

PRODUCTO

BISAGRA OCULTA MODELO 522, ZAMAK

► DESCRIPCIÓN

Bisagra invisible, modelo 522, para puertas de paso no solapadas y para marcos de madera. Profundidad de fresado reducida de 21 mm. Sistema funcional de bisagra completamente oculto. Regulación en 3 sentidos (lateral +/- 1,5 mm, altura +/- 2,5 mm, profundidad +/- 1,0 mm). Hasta 60 kg. (2 bisagras). Medidas: 110 x 24 mm. Material: Zamak.





► MATERIAL

Zamak.

► ACABADO

Cromo satinado, níquel satinado, negro satinado y blanco.

IMÁGENES

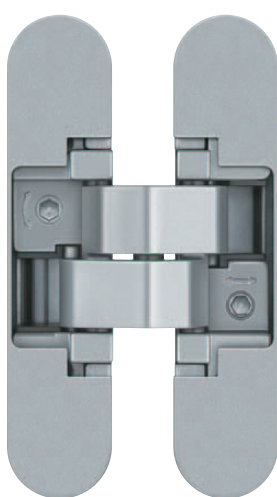

OTROS DATOS

REF. AN 170 3D

ACABADO: 110x24 mm

CÓDIGO	REFERENCIA	ACABADO
96521	AN 170 3D-44 IND	NÍQUEL SAT.
96525	AN 170 3D-17 IND	BRONCE
96526	AN 170 3D-39 IND	CROMO BRILLO
96524	AN 170 3D-18 IND	NEGRO SAT.
96528	AN 170 3D-36 IND	CROMO
96523	AN 170 3D-49 IND	BLANCO SAT.
96527	AN 170 3D-37 IND	LATÓN BRILLO
96522	AN 170 3D-14 IND	CROMO SAT.

AN 170 3D

for unrebated residential doors with 21 mm reduced hinge frame part up to 60 kg

hinge	21 mm hinge frame part	up to 60 kg
-------	------------------------	-------------

Product features

- reduced hinge frame part 21 mm
- completely concealed hinge system
- for timber frames
- for unrebated residential doors
- 3D adjustable (side +/- 1.5 mm, height +/- 2.5 mm, compression +/- 1.0 mm)
- material zamak

Technical details

load capacity	i 2 hinges per door leaf (900x2100 mm)	60.0 kg
overall length		110.0 mm
width (frame)		24.0 mm
width (door)		24.0 mm
cutter diameter		14.0 or 16.0 mm
collar ring diameter		25.0 or 27.0 mm
opening angle		180°

Finish

Satin Chrome (AN 014), Coated Bronze (AN 017), Black (AN 018), Antique Bronze (AN 035), Aluminium Chrome (AN 036), Polished Brass (AN 037), Polished Chrome (AN 039), Satin Nickel (AN 044), RAL 9016 Traffic White (AN 049)

Combination

receiver	casing frame	AN 140 3D FZ
----------	--------------	--------------

Note

i The load capacity mentioned above refers to the use of 2 hinges per door leaf (900 x 2100 mm).

Suggested screws:

Frame side: Countersunk head screws DIN 7505 A, Diameter 4.5 mm

Door side: Pan head screws DIN 7505 B, Diameter 4.5 mm