

## PRODUCTO

## VERSA STAIR

## ►DESCRIPCIÓN

Desarrollado especialmente para la iluminación de escaleras. Stair Stringer sirve como la línea de conexión básica entre el balasto y las fuentes de luz.

**Características**

Tipo de iluminación: Acento/orientación.

Tensión de servicio: 12 voltios CC.

Color de la luz: Extrablanco, blanco cálido y neutro blanco.

Rendimiento de color RA: > 90.

Eficiencia energética: F 100 lm/W.

Durabilidad: 50.000 h.

Consumo de energía: 1,7 W/m.

Número LEDs: 120/m.

Ángulo del haz: 120°.

Tipo de protección: IP 20.

Cable de alimentación: 1800 mm.

Conexión enchufable: Mini conector JST.

Conexión a: Balasto LED.

## IMÁGENES



## Versa Stair

### Advantages

- ▶ Easy installation; high possibility of pre-assembly, just plug together on site
- ▶ Slim wire harness can be invisibly built into the cheek
- ▶ 15 steps, each 1.20 m long, require only one ballast

### Features

- ▶ Can be cut, self-adhesive
- ▶ Low power consumption
- ▶ Uniform illumination (120 LED/m)

### Examples of use

- ▶ Especially developed for stair lighting

### Order information

- ▶ Accessories for stringer staircases and closed staircases can be selected
- ▶ Stair Stringer serves as the basic connecting line between the ballast and the light sources

### Versa Stair

	XtraWarmWhite	WarmWhite	NeutralWhite
1200 mm (max. 2W)	55 912 41	55 912 11	55 912 01

### Accessories in general

Ballast 12 Volt DC, 30 W with flat Euro plug	31 002 07
M1 Extension lead 1800 mm	36 768 01
X-Mitter Smart Set 12 Volt DC	31 108 01

### Accessories for stringer stairs

Connection cable power supply 100 mm	39 905 01
Connection cable power supply 300 mm	39 905 02
ballast feeder 1800 mm	39 905 04
Connection cable luminaire 100 mm	39 905 06
Connection cable luminaire 300 mm	39 905 07
Stair Stringer for Versa 2000mm	55 911 01
Carrier Plate (Channelline F) 2000 mm	55 664 01

### Accessories for closed staircases

Connection cable luminaire / ballast	39 905 08
M1 Staircase distributor 2-way 450 mm	39 903 02

\* Further accessories in this catalogue from page 30

### Technical details



Luminaire type:	Accent/ orientation lighting
Operating voltage:	12 V DC
Light colour:	XtraWarmWhite/ WarmWhite/ NeutralWhite
Colour rendering:	> 90
Energy efficiency:	F
Life span:	100 lm/W
Power consumption:	50.000 h
Dimmable:	1.7 W/m
Number of LEDs:	Yes/PWM/Smart.home
Beam angle:	120/m
Half value angle:	120°
Test mark and symbols:	70°
Protection rating:	CE, RoHS, WEEE
Supply lead:	IP 20
Plug connector:	1800 mm
Connection to:	JST mini connector
	LED ballast




### Zigbee controller for controlling lights

- Uses the Zigbee 3.0 protocol
- Supports Zigbee TouchLink
- Adding devices to the self-configuring Zigbee Touchlink network possible
- Compatible with Zigbee Gateway universal products
- Compatible with Zigbee universal remote controls

MÁS INFORMACIÓN

Dimensional drawing / installation

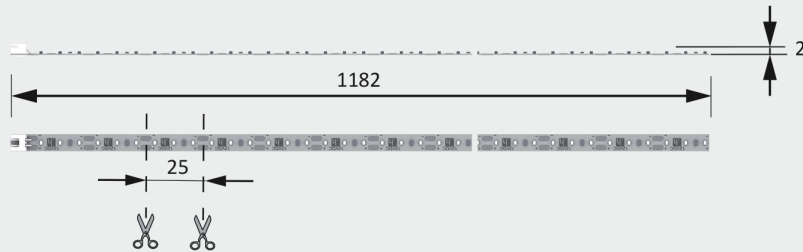

55.911.01



55.664.01/02

